



COMMERCIAL REFRIGERATION

www.blueairinc.com | info@blueairinc.com

Toll Free 1.866.677.8500

PROJECT :	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	
APPROVAL :	

## Undercounter Refrigerators / Freezers

BLUR60/BLUF60



BLUR72/BLUF72



BLUR28/BLUF28



BLUR36/BLUF36



BLUR48/BLUF48

### STANDARD FEATURES

**STAINLESS STEEL INTERIOR AND EXTERIOR**

*QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES, AND RUST*

**BACK MOUNT COMPRESSOR**

*THE BACK MOUNTED COMPRESSOR PROVIDES EASY ACCESS FOR MAINTENANCE*

**CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION**

**SELF-CLOSING DOORS WITH RECESSED DOOR HANDLES**

*OUR RECESSED DOOR HANDLES HELP PREVENT SHIPPING DAMAGE AND BREAKAGE*

**EPOXY COATED WIRE SHELVES WITH ADJUSTABLE SHELVING HEIGHT**

**FIELD REVERSIBLE DOOR (ADDITIONAL KIT REQUIRED)**

*BLUR28 AND BLUF28 MODELS ONLY*

**DURABLE DOOR GASKET WITH EASY REPLACEMENT**

**4" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES**



Conforms to NSF/ANSI 7(ETL)

**WARRANTY**

3 Years Parts and Labor  
5 Years on Compressor in USA


**APPROVALS:**

**AVAILABLE AT:**

VER10016

# Undercounter Refrigerators / Freezers

## Product plan View

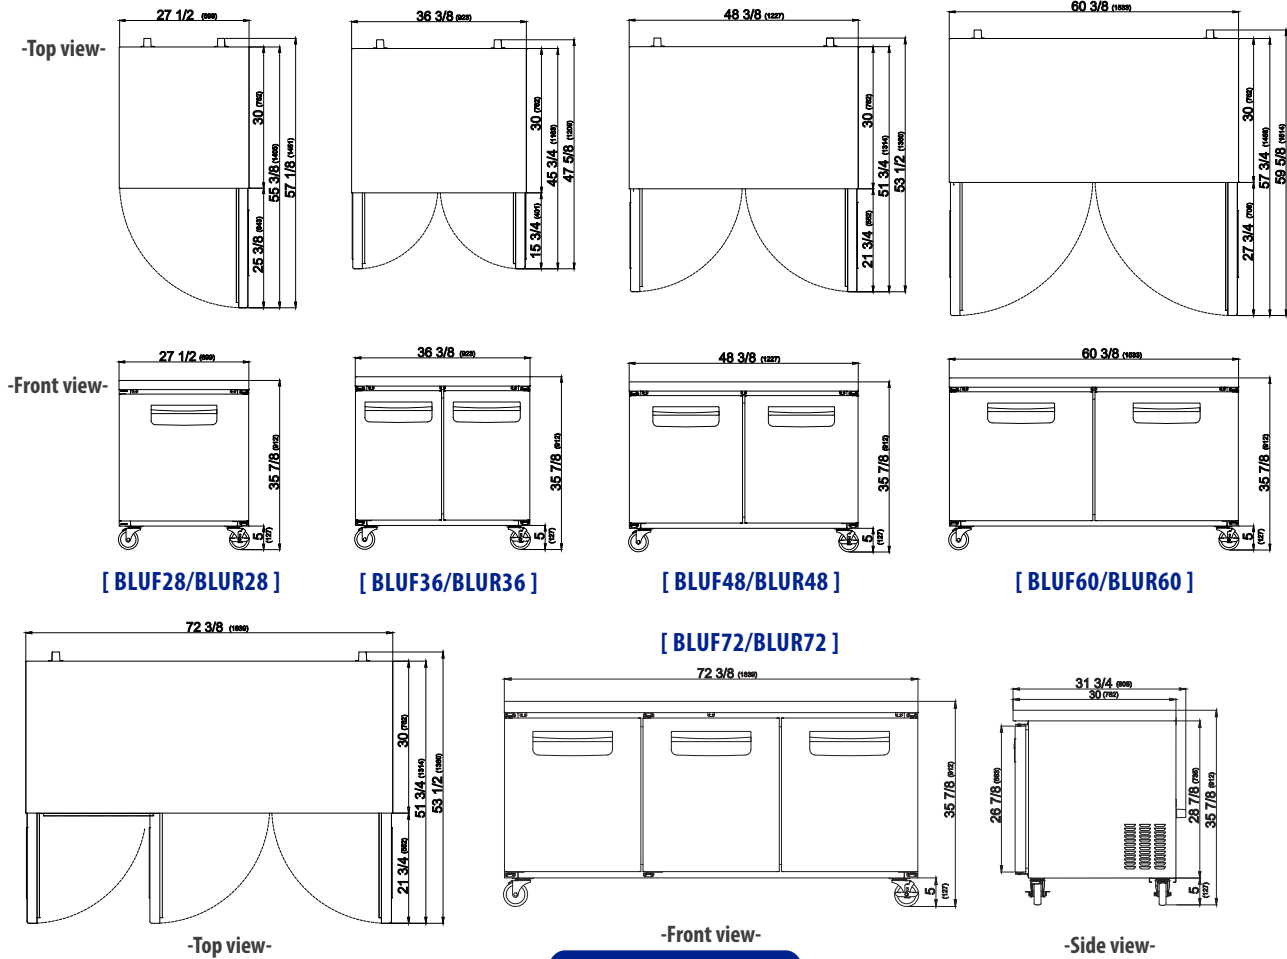

## Product Specification

### Undercounter Freezer

Model	Product Description			Refrigerant	Temperature Range	Voltage	NEMA Config.	Cord Length (ft/m)			
	Undercounter Freezer			R-134a/R-404a	Below 0°F	115V/60Hz	NEMA5-15	9.8ft (3m)			
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Foot	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H						
BLUF28	1	7	2	27 1/2"(699mm)	30" (762mm)	35 7/8"(912mm)	1/3	4 Casters	5	150 (68)	156 (75)
BLUF36	2	9.5	4	36 3/8"(923mm)	30" (762mm)	35 7/8"(912mm)	1/3	4 Casters	5.2	187 (81)	192 (87)
BLUF48	2	13	4	48 3/8"(1227mm)	30" (762mm)	35 7/8"(912mm)	1/3	4 Casters	6	209 (95)	227 (103)
BLUF60	2	16.5	4	60 3/8"(1533mm)	30" (762mm)	35 7/8"(912mm)	1/2	4 Casters	7.7	247 (112)	268 (122)
BLUF72	3	20	6	72 3/8"(1839mm)	30" (762mm)	35 7/8"(912mm)	1/2	4 Casters	7.7	280 (127)	338 (153)

### Undercounter Refrigerator

Model	Product Description			Refrigerant	Temperature Range	Voltage	NEMA Config.	Cord Length (ft/m)			
	Undercounter Refrigerator			R-134a	32 ~40 °F	115V/60Hz	NEMA5-15	9.8ft (3m)			
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Foot	Amps	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H						
BLUR28	1	7	2	27 1/2"(699mm)	30" (762mm)	35 7/8"(912mm)	1/5	4 Casters	3.3	143 (65)	156 (75)
BLUR36	2	9.5	4	36 3/8"(923mm)	30" (762mm)	35 7/8"(912mm)	1/5	4 Casters	3.5	172 (78)	192 (87)
BLUR48	2	13	4	48 3/8"(1227mm)	30" (762mm)	35 7/8"(912mm)	1/5	4 Casters	3.5	194 (88)	227 (103)
BLUR60	2	16.5	4	60 3/8"(1533mm)	30" (762mm)	35 7/8"(912mm)	1/3	4 Casters	5.5	236 (107)	268 (122)
BLUR72	3	20	6	72 3/8"(1839mm)	30" (762mm)	35 7/8"(912mm)	1/3	4 Casters	6	269 (122)	309 (140)

\* BLUE AIR has the right to change specifications without further notice.



<http://www.blueairinc.com>  
[info@blueairinc.com](mailto:info@blueairinc.com)  
 Toll Free. 1.866.677.8500

223 W. Rosecrans Ave., Gardena, CA., 90248  
 T.310.808.0102, F.310.808.0242  
 9 W. Shelton Terrace #A, Hillside, NJ., 07205  
 T.908.688.0970, F.908.688.8143